

Product Technical Information Sheet


Blockleys™

Charcoal Chamfered Pavers

Profile Paver Type:	Rectangular	Dimensions:	210 x 105 x 65 mm		
Profile Arrises:	Chamfered	Dimensional Range:	R1		
Abrasion Resistance:	A3	Dimensional Tolerance:	L:±6mm W:±4mm T:±3mm		
Transverse Break Load:	T4	Dimensions Comment:	Dimensions include 3mm Spacer Nibs		
Slip Skid Resistance:	U3	Reflectance Value Dry:	6.5		
Freeze/Thaw Resistance:	FP100	Reflectance Value Wet:	5		
Reaction to Fire:	Class A1 _(FL)	Acid Resistance:	Class C		
External Fire Performance:	Class B _(ROOF)	Dangerous Substances:	N/A		
Thermal Conductivity (P = 50):	0.72	W/m.K	Thermal Resistance (P = 50):	0.09	m².K/W
Thermal Conductivity (P = 90):	0.79	W/m.K	Thermal Resistance (P = 90):	0.08	m².K/W
Quantity per Pack:	400	Recycled Content:	0	%	
Products per Square Metre:	46	Net Dry Density:	2290	kg/m³	
Product Weight:	3.08	kg	DoP common root reference code:	--BL65PVB--	

Clay pavers are manufactured and supplied to relevant clauses of **BS EN 1344**.

Declarations of performance, environmental and other policies can be found on the company website: www.mbhplc.co.uk. Further information is available via our sales department on 0844 931 0022 or email sales@mbhplc.co.uk.

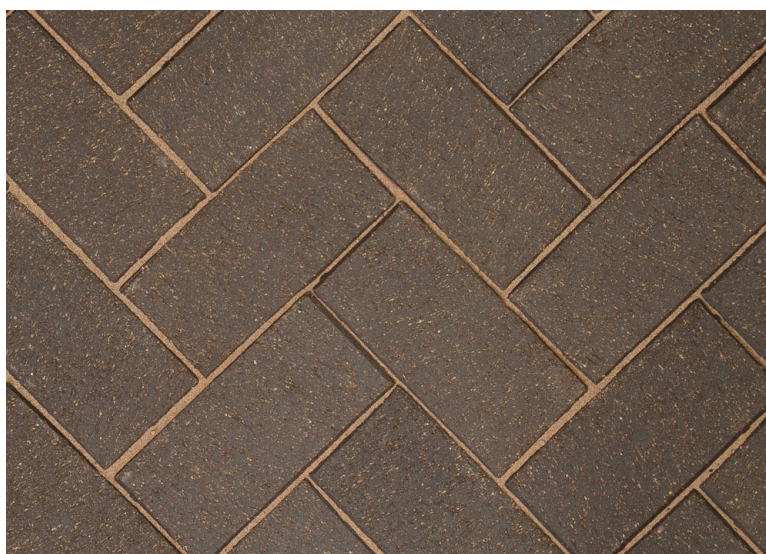

Technical data correct at the time of issue. Please order a sample for accurate representation of product.

Issue Date: 10/01/24